

FACT SHEET

# M/V Kongsborg

**OWNER**

Skansi Offshore,  
Faroe Islands

**DESIGN**


Havyard 833

**YARD**

Havyard, Leirvik,  
Norway

**BUILT**

2013

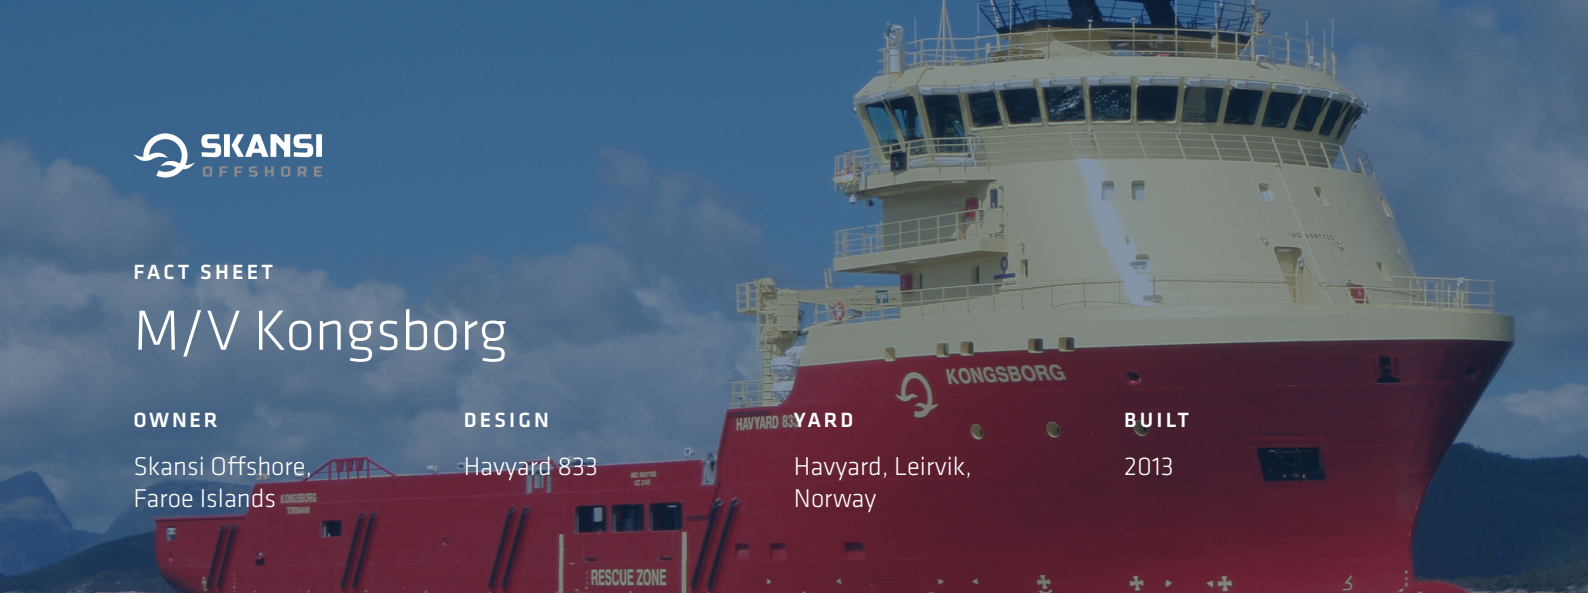

**MAIN PARTICULARS**

LOA	86.80 m
LPP	76.80 m
Air Draught	30 m
Breadth, moulded	19.60 m
Depth to Main Deck	8.00 m
Depth to A Deck	10.80 m
Maximum Draught	6.50 m
Deadweight at 6.60 m draught	4700 ton
Deck Cargo	2700 ton
Cargo deck area	1002 m <sup>2</sup>
Deck strenght	10 ton/m <sup>2</sup>
Accommodation	27
Service Speed	10 Kn
Max Speed	15 Kn

**CAPACITIES**

Fuel Oil	1200 m <sup>3</sup>
Dry Bulk	400 m <sup>3</sup>
Base Oil	305 m <sup>3</sup>
Mud	1045 m <sup>3</sup>
Brine	515 m <sup>3</sup>
Water Ballast/Drill Water	3300 m <sup>3</sup>
Fresh Water	800 m <sup>3</sup>
Oil recovery	1560 m <sup>3</sup>
Methanol (LFL*)	200 m <sup>3</sup>
Slop	50 m <sup>3</sup>



**CLASSIFICATION**

Rina: Supply Vessel - Heavycargo; Oil recovery ship;  
Unrestricted navigation; AUT-UMS; COMF-AIR; COMF-NO-  
ICE-C; COMF-IBE-C; DMS; DYNPOS AM/AT R; Green plus; ICE  
CLASS ID; Inwatersurvey; PMS; SYS-IBS;

Approved for NOFO 2009 (1.9) and Standby rescue (NMD 250 persons)

**DP REFERENCE SYSTEMS**

- 2 x DGPS
- 1 x RADIUS
- 1 x Cyscan

**MANOUEVERING AND PROPULSION SYSTEMS**

Main Engines	4 x Caterpillar 1785 kW with NOx reducing catalyst systems
Propulsion	2 x Steerprop 1900 kW main azimuth thrusters
Emg. Gen.	1 x Caterpillar 270 kW
Bow Thruster	2 x Brunvoll 880 kW
Retractable Azimuth	1 x Brunvoll 800 kW

**OPTIONS**

FIFI I

**OTHER**

Shore connection